





ProTech Slider

Less weight, more robust, simply better

- The weight is reduced by 25 kg compared to similar products of competitors
- Also suitable for broad frame hole patterns (for example New Actros)
- There is a double wrap-around, making the profile extremely safe
- Self-locking mechanics, meaning the blocking pieces will always remain in the right position
- Optimal relation of "traversing length to overall length"
- Easy and safe to use
- Guide bars in throat of fifth wheel coupling to correctly position king pin
- Optional with Sensoric (3 sensors)
- Optional with LubeTronic 1Point
- Optional with pneumatic or mechanic system
- Optional Fleet Master handle
- Especially robust and long lasting through highest quality

ProTech Slider

Technical Specification

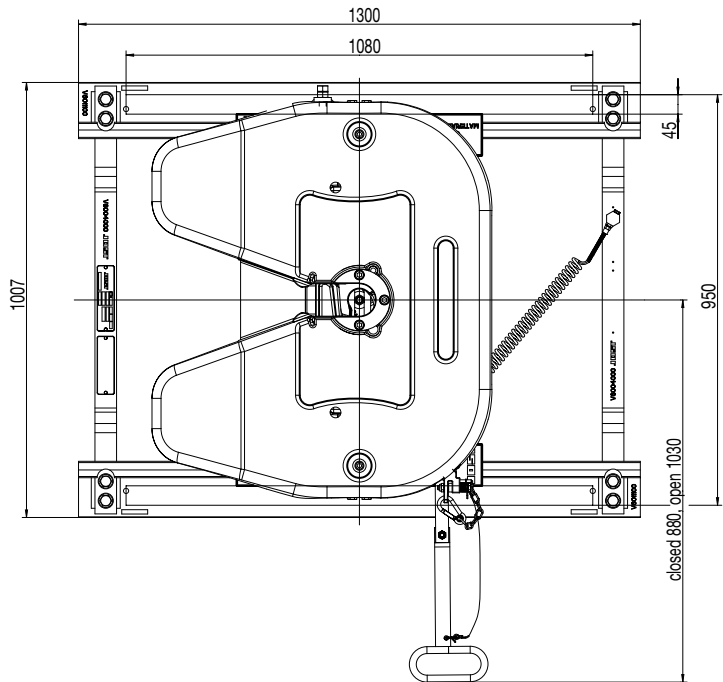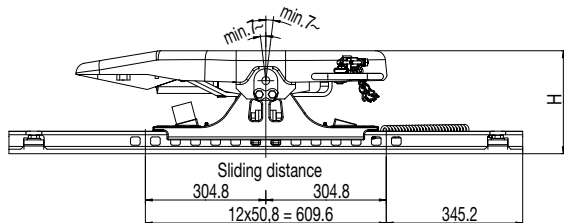

Order-No.	H (mm)	Fifth wheel coupling	Weight (kg)	Twist locks pneumatic	Twist locks manual	LubeTronic 1Point	Sensoric
JSK PO D0 33 06 AA	JSK 36 D	175	215		x		
JSK PO D0 33 20 AA	JSK 36 D	175	215	x			
JSK PO D0 33 D5 AA	JSK 36 D	175	216	x			x
JSK PO D0 33 D6 AA	JSK 36 D	175	216		x		x
JSK PO D0 71 06 AA	JSK 36 D	260	220		x		
JSK PO D0 71 20 AA	JSK 36 D	260	220	x			
JSK PO D0 71 D5 AA	JSK 36 D	260	221	x			x
JSK PO D0 71 D6 AA	JSK 36 D	260	221		x		x
JSK PO E0 33 06 AA	JSK 37 E	175	230		x		
JSK PO E0 33 20 AA	JSK 37 E	175	230	x			
JSK PO E0 33 I3 AA	JSK 37 EW	175	231	x		x	
JSK PO E0 33 T6 AA	JSK 37 EW	175	231		x	x	
JSK PO E0 71 06 AA	JSK 37 E	260	240		x		
JSK PO E0 71 20 AA	JSK 37 E	260	240	x			
JSK PO E0 71 I3 AA	JSK 37 EW	260	241	x		x	
JSK PO E0 71 T6 AA	JSK 37 EW	260	241		x	x	

D-Value: 152 kN

Imposed load: 20 t

Approval (ECE): E1 55R-01 2197

Other models available on request

available with

